

# AUTOLOADER VLseries



由于是成型机连接型，不需要成型机上的料斗

On-machine Type Requires no Injection Hopper

可满足对少量干燥原料的输送、储藏

Small-scale Conveying and Stocking System is Suitable for Conveying Dried Chip

对于输送料斗，可以方便进行简易的脱卸，清扫以及维修保养

Loader Hopper is Light in Weight and can be Continuously and Quickly Connected and Disconnected

微电脑控制，操作界面良好

It is Designed for Easy Cleaning. Incorporated Microcomputer Improves Handling and Controlling

带集尘筒的旋风分离器



Cyclone with Dust Collection Tank

## 规格 Specifications

| 型号/Model                                   | VL-0208C-KS   | VL-0219C-KS | VL-0708C-KS         | VL-0719C-KS | VL-0735C-KS |
|--|---|-------------|---------------------|-------------|-------------|
| 容量/Capacity (L)                            | 2.5   |             | 7.0                 |             |             |
| 风机容量/Blower capacity (50/60Hz)(kW)         | 0.55/0.85   | 1.3/1.9     | 0.55/0.85           | 1.3/1.9     | 2.3/3.4     |
| 料位计/Level switch                           | 光电式料位计 /Optical switch  |             | 电动式料位计 /Torque type |             |             |
| 主断路器容量/Main breaker capacity (200-220V)(A) | 10/10   | 10/20       | 10/10               | 10/20       | 15/32       |
| 总电气容量/Power supply (50/60Hz)(kW)           | 0.55/0.85   | 1.3/1.9     | 0.55/0.85           | 1.3/1.9     | 2.3/3.4     |
| 附属品/Accessories                            | PVC软管/PVC flexible hose Φ38×5m×2pcs, 吸料管/Suction pipe Φ38×650mm×1pcs, 电源线/Power supply cable 5m |             |                     |             |             |
| 涂装色/Painting color                         | 日涂工 Y15-85A 半艶 JPMA Y15-85A semigloss   |             |                     |             |             |
| 机器重量/Weight (kg)                           | 料斗组合/Hopper unit  |             | 6.0                 |             |             |
|  | 56  | 68          | 56                  | 68          | 80          |
|  | 风机组合/Blower unit  |             | 80                  |             |             |

※带有集尘筒的旋风分离器规格  
Cyclone with dust collection tank is also available

## 输送能力表 Conveying capacity

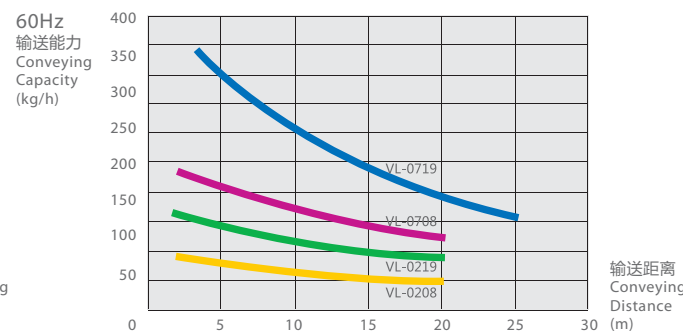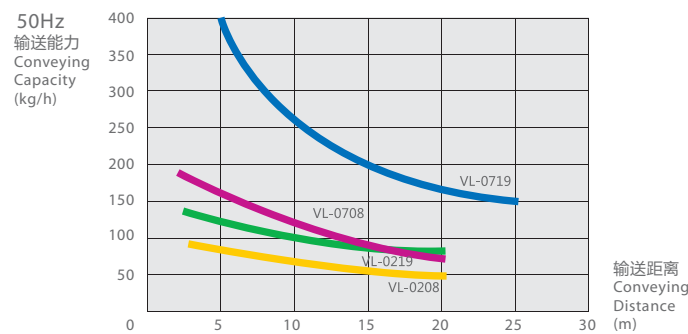

\*以比重0.6g/cm<sup>3</sup>为输送条件  
\*以输送垂直距离3m为输送条件  
\* Conveying capacity is under the condition that the bulk density of the pellet is 0.6g/cm<sup>3</sup>  
\* 3m in a vertical position is included in the whole conveying distance

# AUTOLOADER ALseries



由于是单体式构造，便于清扫与维修保养

Simple Structure Makes Cleaning Easier

微电脑控制，操作界面良好

It is Designed for Easy Cleaning. Incorporated Microcomputer Improves Handling and Controlling

配合简易混料装置，可实现 2 种材料的输送 (选配件)

Auto-Selector(optional) Allows Conveying Two Kinds of Materials

风机组合中配有布袋式过滤器 (适用于粉碎材的输送)

Blower Unit with Bag Filter is Available (The most Suitable for Conveying Granule)

带集尘筒的旋风分离器



Cyclone with Dust Collection Tank

## 规格 Specifications

| 型号/Model                                   | AL-0208C-KS   | AL-0219C-KS | AL-0708C-KS         | AL-0719C-KS | AL-0735C-KS |
|--|---|-------------|---------------------|-------------|-------------|
| 容量/Capacity (L)                            | 2.5   |             | 7.0                 |             |             |
| 风机容量/Blower capacity (50/60Hz)(kW)         | 0.55/0.85   | 1.3/1.9     | 0.55/0.85           | 1.3/1.9     | 2.3/3.4     |
| 料位计/Level switch                           | 光电式料位计 /Optical switch  |             | 电动式料位计 /Torque type |             |             |
| 主断路器容量/Main breaker capacity (200-220V)(A) | 10/10   | 10/20       | 10/10               | 10/20       | 15/32       |
| 总电气容量/Power supply (50/60Hz)(kW)           | 0.55/0.85   | 1.3/1.9     | 0.55/0.85           | 1.3/1.9     | 2.3/3.4     |
| 附属品/Accessories                            | PVC软管/PVC flexible hose Φ38×5m×2pcs, 吸料管/Suction pipe Φ38×650mm×1pcs, 电源线/Power supply cable 5m |             |                     |             |             |
| 涂装色/Painting color                         | 日涂工 Y15-85A 半艶 JPMA Y15-85A semigloss   |             |                     |             |             |
| 机器重量/Weight (kg)                           | 料斗组合/Hopper unit  |             | 6.0                 |             |             |
|  | 56  | 68          | 56                  | 68          | 80          |
|  | 风机组合/Blower unit  |             | 80                  |             |             |

※带有集尘筒的旋风分离器规格  
Cyclone with dust collection tank is also available

## 输送能力表 Conveying capacity

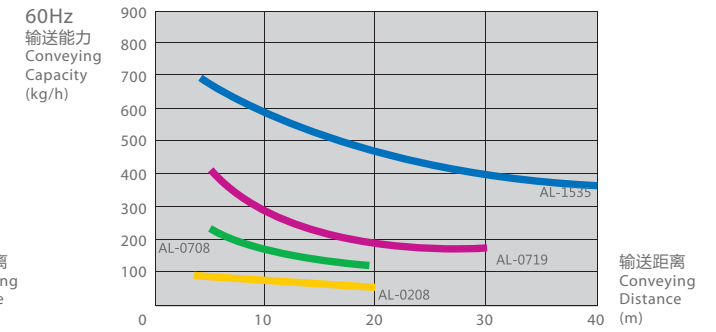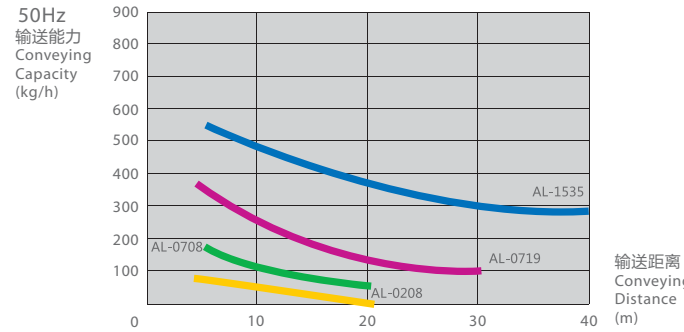

\*以比重0.6g/cm<sup>3</sup>为输送条件  
\*以输送垂直距离3m为输送条件  
\*布袋式过滤器的情况下，以上所说的能力将相应降20%  
\* Conveying capacity is under the condition that the bulk density of the pellet is 0.6g/cm<sup>3</sup>  
\* 3m in a vertical position is included in the whole conveying distance  
\* Conveying capacity for models with the bag filter is lower than above capacity by 20%