

# 自动送料机 AUTOLOADER

# AUTOLOADER VVL/AVL/AALseries

## 可实现2台送料机的功能 2方向输送可自由组合

Performing Function of 2 Loaders  
Free Combination of 2-Direction Conveying

### 购买价格相对便宜 (购买我司 2 台单方向机器时比较)

Price Advantage (Compared with Two Single Loaders)

### 省空间 (用 1 台可实现风机组合 2 台的效果)

Space Savings (Need only a Single Room)


### 可根据输送量选择料斗容量

Hopper Capacity Selectable According to Conveying Volume




### VVL series

VL系列1台送料机可实现2台送料机的机能  
VL series x 2

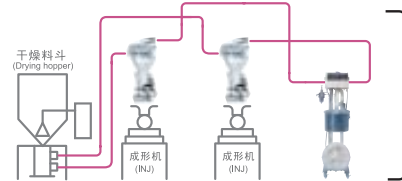


### AVL series

集AL、VL 系列2台机能于一台AVL中  
Combination of AL and VL series

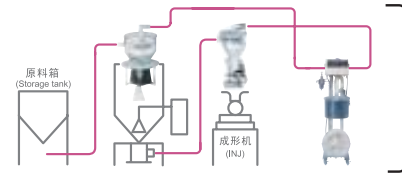

### AAL series

集AL系列2台机能于一身  
For 2 \* AL series

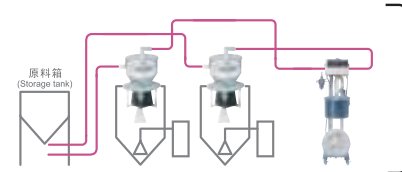


## 规格 Specifications

型号/Model	VVL-02/02-xxC-KS	VVL-07/07-xxC-KS	AVL-07/02-xxC-KS (AVL-07/02-xxB-KS)	AVL-07/07-xxC-KS (AVL-07/07-xxB-KS)	AAL-02/02-xxC-KS (AAL-02/02-xxB-KS)	AAL-07/07-xxC-KS (AAL-07/07-xxB-KS)
容量/Capacity (L)	VL-02(2.5L) x 2pcs	VL-07(7.0L) x 2pcs	AL-07(7.0L) x 1pcs + VL-02(2.5L) x 1pcs	AL-07(7.0L) x 1pcs + VL-07(7.0L) x 1pcs	AL-02(2.5L) x 2pcs	AL-07(7.0L) x 2pcs
风机容量/Blower capacity (50/60Hz)(kW)	0.55/1.3/2.3/3.3(50Hz) 0.85/1.9/3.4/5.0(60Hz)			0.55/1.3/2.3/3.3/5.5(50Hz) 0.85/1.9/3.4/5.0/7.5(60Hz)		
总电气容量/Power supply (50/60Hz)(kW)	0.55/1.3/2.3/3.3/5.5(50Hz) 0.85/1.9/3.4/5.0/7.5(60Hz)					
附属品/Accessories	PVC软管/PVC flexible hose Φ38x5m x 4pcs, 吸料管/Suction pipe Φ38x650mm x 1pcs, 电源线/Power supply cable 5m					
涂装色/Painting color	日涂工 Y15-85A 半艶 JpMA Y15-85A semigloss					
机器重量/Weight (kg)	料斗组合/Hopper unit 5.0 x 2	6.0 x 2	6.0 x 1 + 5.0 x 1	6.0 x 1 + 6.0 x 1	5.0 x 2	6.0 x 2
	风机组合/Blower unit 56/70/82/118/127/139/222/237					

※带有集尘筒的旋风分离器规格  
Cyclone with dust collection tank is also available

## 外形尺寸图 Dimensions

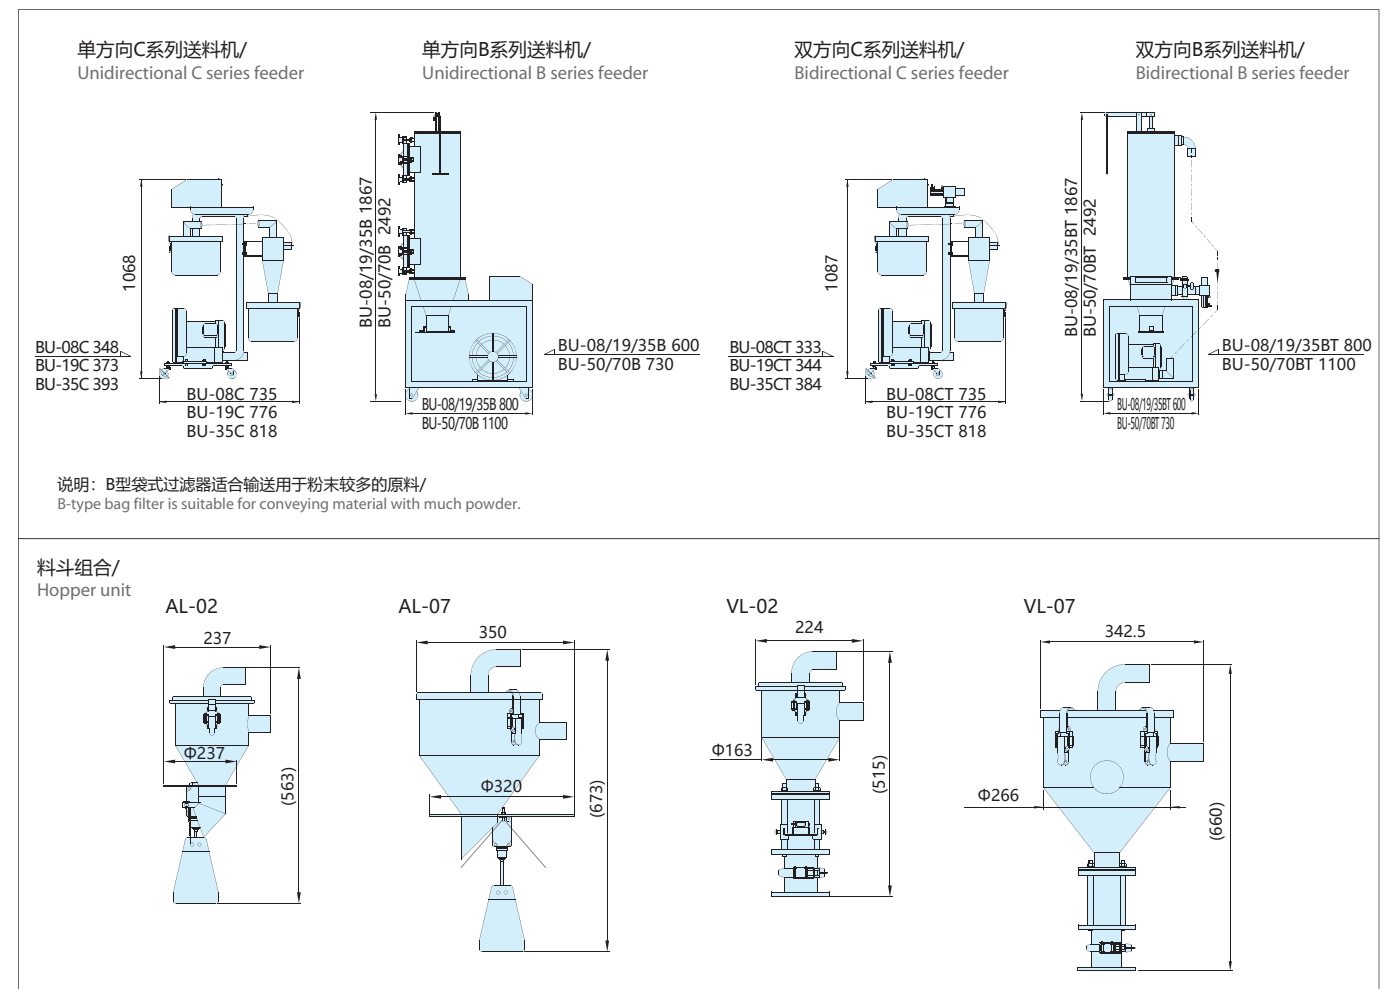

## 选购件 Options

- 真空料斗/Vacuum hopper
- 沸騰式除尘料斗/Air blender
- 除粉尘装置/Dust separator
- 磁力架/Magnet filter
- 异电压对应/Different supply voltage
- 空气清扫装置/Air cutting
- 报警灯/Visual alarm
- 气路汽缸切换阀/Direction diverging valve

## 简易混料装置 AUTO SELECTOR SL Series



- 最适合于新材料和粉碎材的简易混合
- 简易混料装置是与送料机吸引侧相连接, 通过汽缸实现2种材料的交替输送
- 可以用定时器自由控制混合比率的设定变更
- Suitable for simple mixing of new materials and granule
- Conveying two kinds of materials alternately with the flick of the switch while connected to the material inlet of AUTO LOADER
- Adjustable mixing ratio by timer setting

## 规格 Specifications

型号/Model	SL-38-KS	SL-48-KS	SL-60-KS
主回路/Main circuit	AC200,220V/50,60Hz 2P+E		
压缩空气使用量/ Compressed air requirement	Approx.0.02L/min(ANR) (0.4-0.6MPa)		
外形尺寸/Dimensions (WxDxH)(mm)	243x170x281	243x197x296	256x254x549
机器重量/Weight (kg)	4		7

## 原料料箱 MATERIAL TANK H Series



## 规格 Specifications

型号/Model	H-50-KS	H-100-KS	H-200-KS	H-400-KS	H-600-KS	H-1000-KS
容量/Capacity (L)	50	100	200	400	600	1000
材质/Material	JFE443CT/SUS304					
排料管口径/Discharging pipe diameter (mm)	Φ38 (或指定管径/Or special)					
外形尺寸/Dimensions (WxDxH)(mm)	515x515x750	615x615x780	615x615x913	815x815x1085	1015x1015x1140	1165x1165x1332
机器重量/Weight (kg)	26	34	39	55	80	128

※可根据要求制作2m³-100m³的原料储存  
2m³-100m³ material silo can be made as requested