

AUTOCOLOR II

WAC series

拥有广泛实绩与信誉的重量式计量混合装置

Gravimetric Batch Blender of Extensive Achievements and High Reliability



首创的重量式计量混合装置

Trailblazing Force of Gravimetric Blenders

提供多式样的组合方式，以应对各种需求

Various Combinations to Meet all Needs

采用本公司独创的对话式液晶显示屏

Kawata's Original Interactive Liquid Crystal Touch Panel for easy Operation

操作性、清扫性大幅提高

Significant improvements in usability and cleaning efficiency




配合客户的使用要求，量身定制

Customizable according to Using Requirement


规格 Specifications

型号/Model	WAC-300-KS	WAC-600-KS	WAC-1000-KS
最大处理能力/Max. throughput (kg/h)	150	300	600
材料种类/Kinds of materials	1~6种(7种以上特殊对应)/1-6 kinds(special design for more than 7 kinds)		
料斗容量/Hopper capacity (L)	80		100
计量方式/Weighing	重量计量/Gravimetric		
机器重量/Weight (L)	250	330	440

流程图 Flowsheet

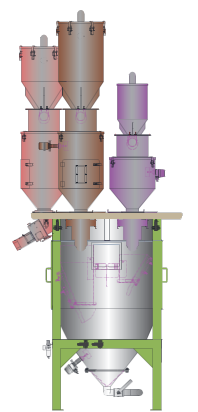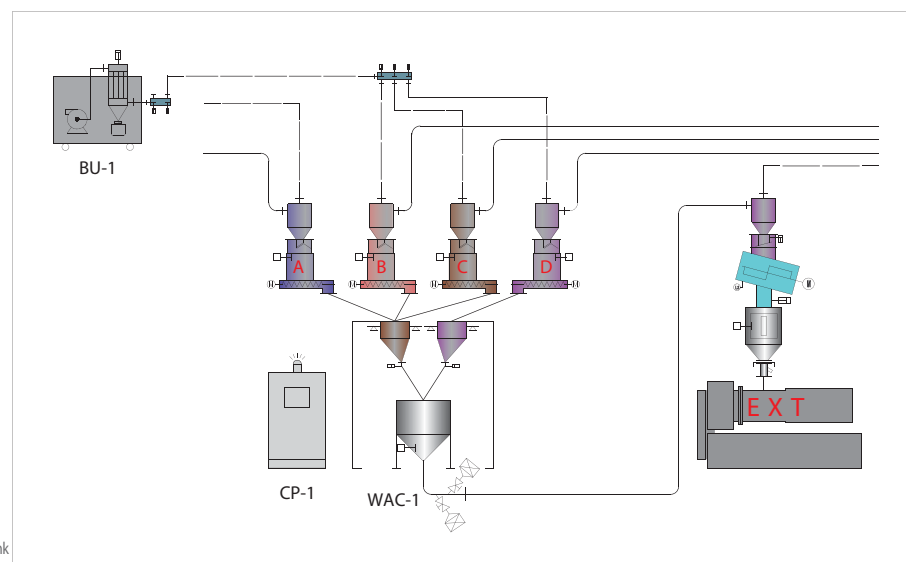

WAC

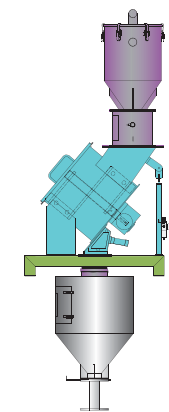

二次侧材料混合贮存料斗
Secondary Mixed material Storage tank



AUTOCOLOR II

VB series

简洁化操作的容量式计量装置!

Volumetric-type Measuring Machine with Simple Operation!

规格 Specifications

型号/Model	VB-50/2-KS	VB-50/3-KS	VB-50/4-KS	VB-100/2-KS	VB-100/3-KS	VB-100/4-KS	VB-250/2-KS	VB-250/3-KS	VB-250/4-KS
最大处理能力/Max. throughput (kg/h)	50			100			250		
最大材料数/Max. NO. of materials	2	3	4	2	3	4	2	3	4
计量规格/ Weighing	供给方式/Supplying mode 螺杆计量/Screw feed								
	计量方式/Metering mode 容量计量/Volumetric metering								
	计量精度/Metering accuracy ±2% (F.S.) /±2% and Below of FS								
混合搅拌方式/ Mixing & agitator	混合/Batch mixing system by agitator								
	一次送料斗(输送1)/Convey-1 AL03×2 AL03×3 AL03×4 AL05×2 AL05×3 AL05×4 AL05×1,AL10×1 AL05×2,AL10×1 AL05×3,AL10×1								
	二次送料斗(输送2)/Convey-2 AL03+IH10 AL05+IH20 AL10+IH50								
风机容量/Blower capacity (50/60Hz)(kW)	0.55/0.85			1.3/1.9			2.3/3.4		
风机容量/Blower capacity (50/60Hz)(kW)	0.55/0.85(和一次输送兼用/Concurrent use of blower with primary conveying)			1.3/1.9(和一次输送兼用/Concurrent use of blower with primary conveying)			2.3/3.4(和一次输送兼用/Concurrent use of blower with primary conveying)		
输送距离/Distance of conveyance	水平7米, 垂直3米, 弯曲3个/Level 3m, vertical 3m and 3 bending points								
集料斗容量/Collected hopper capacity (L)	5			8			17		
控制方式/Controlling	PLC微电脑控制方式, 主操作LCD (触摸屏) 方式/PLC control, with LCD (touch panel)								
主断路器容量/Main breaker capacity (380/220V)(A)	5/10			10/20			10/20		
总电气容量/Power supply (50/60Hz)(kW)	0.7/1.0			1.4/2.0			1.5/2.1 2.4/3.4 2.5/3.6		
压缩空气用量/Compressed air requirement (L/min)	5(0.4~0.6MPa)(配管口径Φ6/Pipe sizeΦ6)								
附属品/Accessories	PVC软管/PVC flexible hose(Φ38×20/25/30m), 吸料管/Suction pipe(Φ38×650mm), 电源线/Power supply cable(5m)								
涂装色/ Paint color	本体/Body 日漆工 Y15-85A 半艶 JPMA Y15-85A semigloss								
	电控柜/Electric control cabinet 日漆工 C69-50T								
重量/ Weight(kg)	本体/Body 100 110 120			120 130 140			125 135 145		
	电控柜/Electric control cabinet 75			80			105		
外形尺寸/ Dimensions (W×D×H)(mm)	本体/Body 855×575.5×1423			946×575.5×1583			1005×627×1941 1106×627×1941		
	电控柜/Electric control cabinet 611×452×127			611×452×127			611×492×1361		

AUTOCOLOR II

AC series

简洁化操作的容量式计量装置!

Volumetric-type Measuring Machine with Simple Operation!

规格 Specifications

型号/Model	AC-600-KS	AC-1000-KS
最大处理能力/Max. throughput (kg/h)	300	500
最大材料数/Max.NO. of materials	材料最多4种/Maximum of 4 materials	
计量精度/Accuracy	±3~5%	
混合容量/Mixing hopper capacity (L)	24	50

